## Silent Sound Subliminal Mind Control Explained


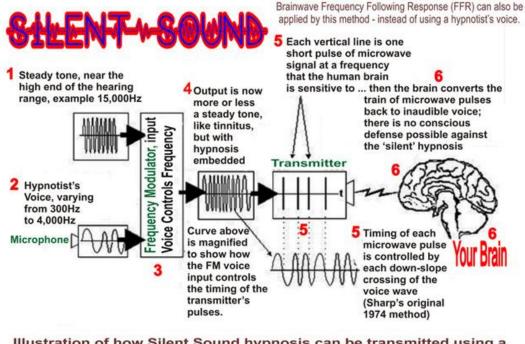



Illustration of how Silent Sound hypnosis can be transmitted using a voice Frequency Modulator to generate the 'voice', then microwave pulsed into the victim's brain via wireless broadcast. (also see Frey Microwave Hearing aka Microwave Auditory Effect)

This is how U.S. Patent 5,159,703 Silent Sound subliminal mind control works, very simply explained. The patent was filed in 1989 and issued in 1992.

In step 1, the unit on the top produces a steady tone, near the high end of the hearing range, about 15,000 Hertz.

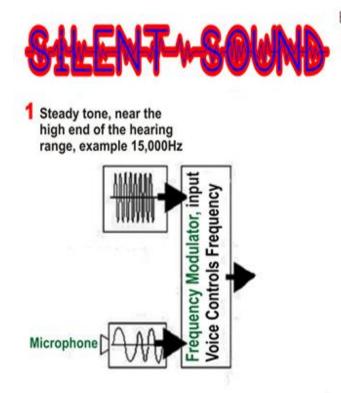

Brainwave Frequency Following Response (FFR) can also be applied by this method - instead of using a hypnotist's voice. In step 2 (which is coupled with step 1), a hypnotist's voice is input via a microphone, ranging from 300 Hertz to 4,000 Hertz.

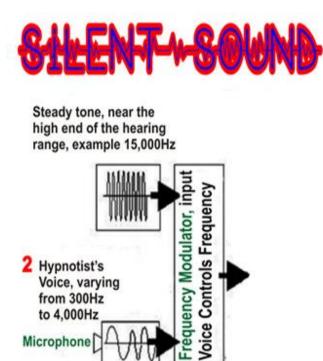


In step 3, the steady tone at 15,000 Hertz, accompanied by the hypnotist's voice from 300 Hertz to 4,000 Hertz, passes into a frequency modulator. The hypnotist's voice controls the frequency.



Brainwave Frequency Following Response (FFR) can also be applied by this method - instead of using a hypnotist's voice.

Brainwave Frequency Following Response (FFR) can also be applied by this method - instead of using a hypnotist's voice.

Steady tone, near the high end of the hearing range, example 15,000Hz




In step 4, you see the output from the frequency modulator, which is the steady tone at 15,000 Hz coupled with the hypnotist's voice at 300 to 4,000 Hz after they pass thru the frequency modulator.

The output that is more or less a steady tone that sounds like tinnitus to the victim (ringing in the ears) but it is not tinnitus, and it has hypnosis embedded in the wave forms. The wave curve output is magnified below to show how the FM frequency modulated voice controls the timing of the transmitter's pulses.




Brainwave Frequency Following Response (FFR) can also be applied by this method - instead of using a hypnotist's voice.

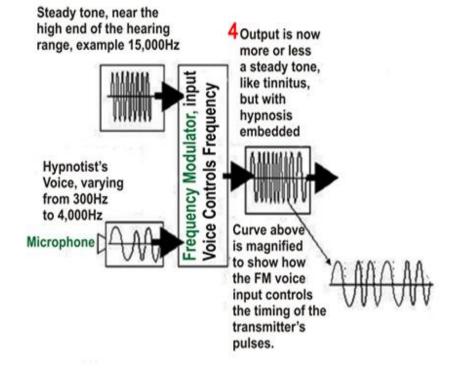


In step 5, you see the transmitter itself. Each vertical line is one short pulse of microwave signal at a frequency to which the human brain is sensitive.

Timing of each microwave pulse is controlled by each down slope crossing of the voice. That is Sharp's original 1974 method.

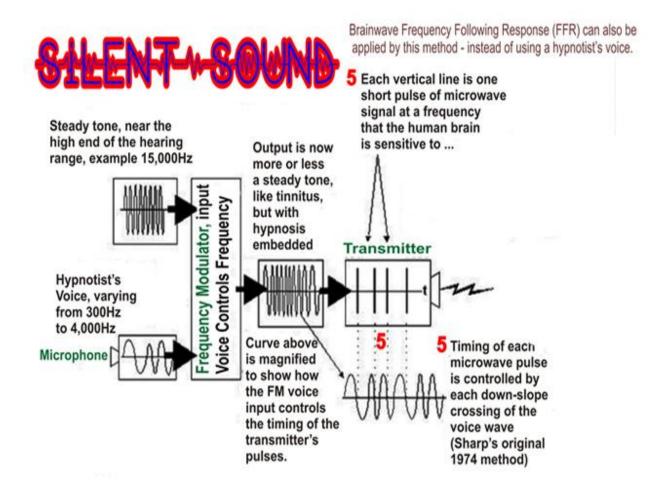

In step 6, you see the total output of the system going into the human brain. The brain converts the train of microwave pulses into an inaudible 'voice'.

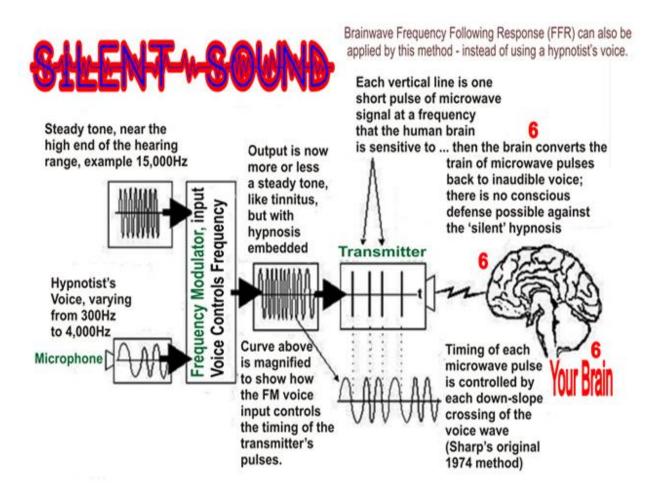



There is no conscious defense against this Silent Sound subliminal hypnosis and the victims are typically unaware of what is being done to them. Brainwave Frequency Following Response (FFR) can also be transmitted by this method. This technology is designed to be broadcast via microwaves that penetrate buildings, walls, etc.

The perpetrators who use this mind control weapon can do this from considerable distances, or from a neighboring apartment, house, etc. This method of subliminal attack is practically undetectable and traceless without special equipment that costs thousands of dollars. Satellites and cell phone towers can also broadcast this mind control technique, in fact, the U.S. National Security Agency has been planning to control the entire population of the planet since it was outlined by NSA Devil Worshiper Michael Aquino in his 1980 'Mind War' paper. Drones can be equipped with capabilities to broadcast this too.


The transmission of speech and these wave forms via microwave frequencies has been possible and in further development since 1974. This is not science fiction, this is all science fact.

The following illustrations are from more Microwave Hearing U.S. Patented technologies and devices. These are only some of the technologies...

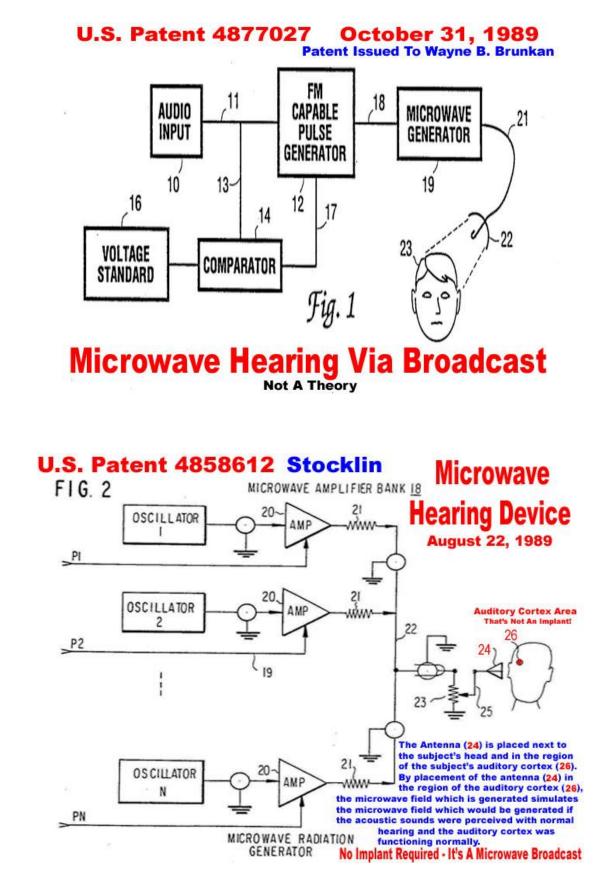

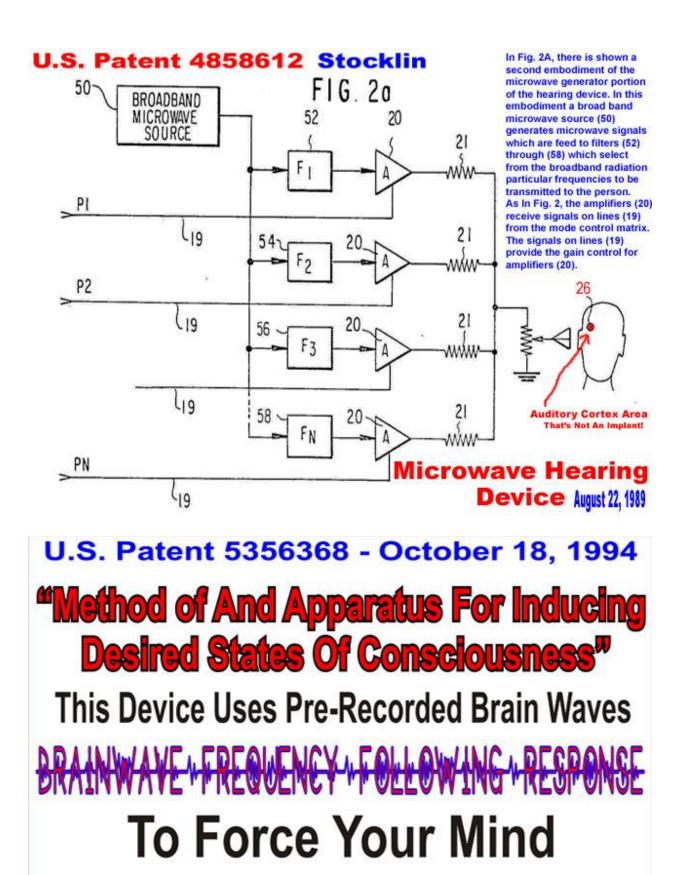


To Follow Those Brain Wave Patterns And Feel What You Are Told To Feel The Brod Theory, this is real working Technology

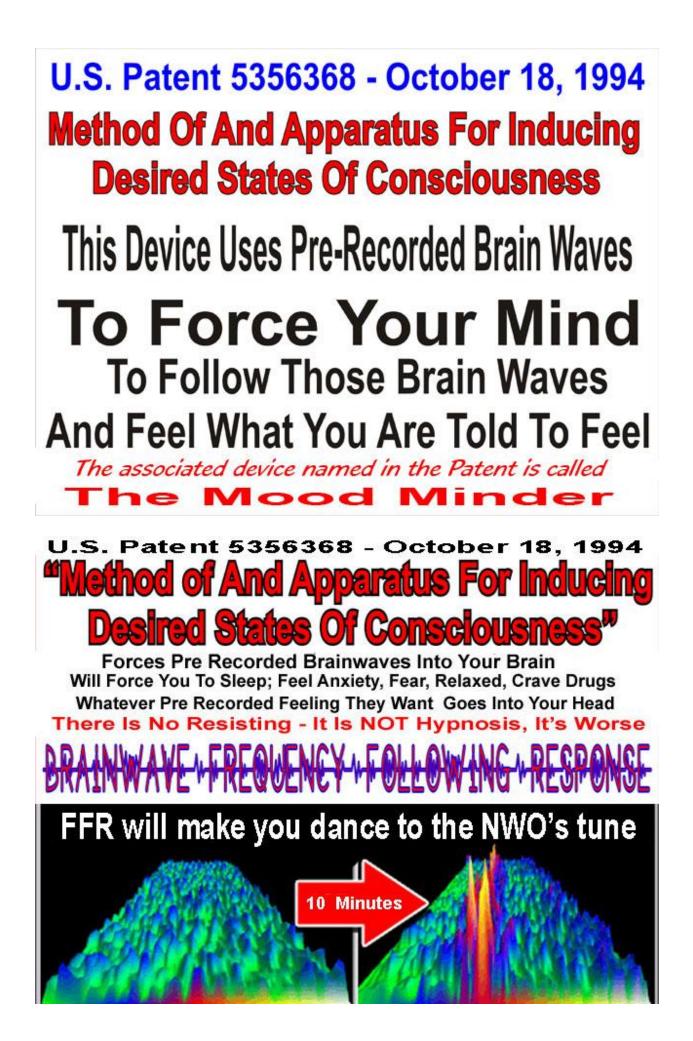



Sound Pulses:

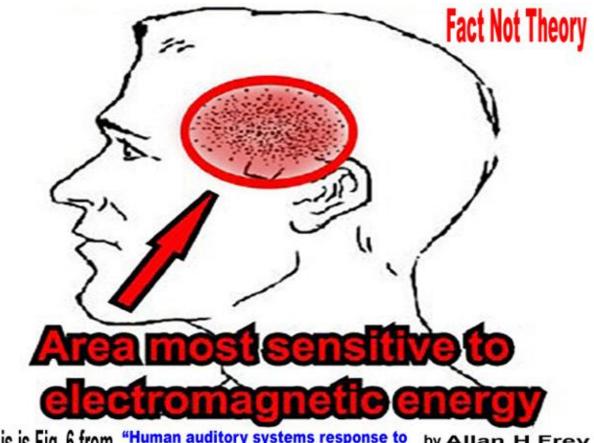

This is Fig. 6 from "Human auditory systems response to by Allan H Frey modulated electromagnetic energy" J. Appl. Physiol. 17(4):689-692 1962